

Basic Specifications of Robot Controller

		FD21	
Outside dimensions		W440×D542×H640 (mm) (Excluding projections)	
Mass	FD19-JV/FD19-JL/FD19-JS/FD19-JVP/FD19-JLP: Approx. 119lb (54kg)		
	FD19-JX: Approx. 126lb (57kg)		
Ambient conditions		Temperature: 32-113°F(0-45°C), Humidity: 20-80%RH (Non-condensing)	
Primary power		200/220VAC, 3-phase (+10%, -15%), 50/60Hz	
Power consumption	Manipulator		Power capacity*2
	NB6, NV8, NB4S, NV6S		1.5 kVA
	NB6L, NV8L, NB15, NV25, NA20, NB4LS, NV6LS, NV20S		2.4 kVA
	NH5, NS3		1.0 kVA
	NV50		5.5 kVA
	NV80, NV100, NV130		4.1 kVA
	NV166, NV210		7.0 kVA
Grounding		Ground the robot controller separately (grounding resistance of 100 ohms or less).	
I/O control over external equipment*1	Number of signals	Input/output 8 points each. Extension of input and output is allowed respectively up to 72 points (Optional).	
	Input specifications	Connect relay contact with a minimum applicable load of 5mA or less at 24VDC, or open-collector device with a leakage current of 1mA or less.	
	Output specifications	Relay board 8/8	24VDC/100VAC, up to 1A (Minimum applicable load [reference]: 5mA at 24VDC)
		I/O board	Open-collector device whose rated current is 0.1A or less at 24VDC ± 3V
Memory capacity		100 million steps (by PTP instruction in a single mechanism)	
Number of task programs		9,999	
External memory I/F		USB flash drive (Optional)	
Color		10GY9/1, Munsell scale	

*1 The number of I/O points can be extended to 2048 by adding an optional field bus (DeviceNet, CC-Link, EtherNet/IP, etc.).

*2 Varies by application & moving pattern.



OTC DAIHEN Website
www.DAIHEN-USA.com

NORTH AMERICA CORPORATE HEADQUARTERS

1400 Blauser Dr, Tipp City OH 45371
Phone: (937) 667-0800
Fax: (937) 667-0885



Member of DAIHEN Group

In accordance with DAIHEN's policy to make continuing improvements, design and/or specifications are subject to change without notice and without any obligation on the part of manufacturer.

DAIHEN ROBOT Website
www.DAIHEN-robot.com/en

ATLANTA TECHNICAL CENTER

3135 Medlock Bridge Road
Norcross, GA 30071
Phone: 888-OTC-ROBO
Fax: (937) 667-0885

DETROIT TECHNICAL CENTER

750 Welch Road
Commerce Township, MI 48390
Phone: 888-OTC-ROBO
Fax: (937) 667-0885



Almega Friendly series II

NEW

Robot Controller

FD21
CONTROLLER

Fast & Easy System Integration

“Connectivity”

Easy connection and cooperation with peripheral devices



Material Handling



Grinding / Finishing



NEW FD21
CONTROLLER



Arc Welding



FD-H5

5-kg
payload



FD-B6

6-kg
payload



FD-V100

100-kg
payload

“Simple & Quick Operation”

Simpler operation to shorten new production startup

The limitless potential of extensive “connectivity”

The versatility to “connect” with facilities, devices and people

Easily “connects” with peripheral equipment through simplified system configuration

High-performance built-in software PLC



Graphical interface offers the functionality of popular PLCs



“Connects” from anywhere in the world

Remote maintenance

Remote support




*Feature available beginning October 2019

Expanded motion control via “connectable” external axis unit

Built-in amplifier and external 2-axis unit

Supports high-capacity (7kW) motors

Increased number of “connectable” motors

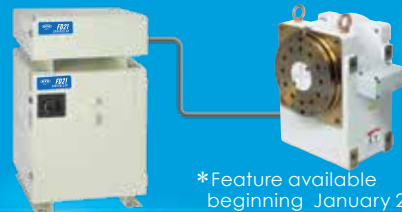

*Feature available beginning January 2020

Improved “connectivity” with welders

Greatly improved synchronization with welders

Simultaneous welding with multiple robots yields greatly improved quality



Enhance your system by “connecting” commercial peripherals

3D Vision System



2D/3D Vision System

Offline teaching system

Laser oscillator

Offline teaching system



Revolutionary Ease of Use

Clear and legible screen

Higher contrast with clearer details




FD11



FD19

Comfortable touch-typing

Embossed main keys



Lightweight with ergonomic grip


15% lighter + enhanced grip design = 66% less arm fatigue

TEACH PENDANT

Tablet-like operation




Menu icons



Scroll screen by swipe operation

Touch screen keypad for numeric entry



Enhanced Basic Performance

Small footprint

25% narrower than the previous model
Ideal for high-density installations




300mm

Complies with the latest international safety standards

Supports multiple safety control standards for emergency stop: Cat. 4, PLe, and SIL3.


Programmable working envelope



Safer working environment

- RMU* constantly monitors robot movement.
- Restricts robot movement when worker is present in a shared area.

* Robot Monitoring Unit



Optimized for high-precision laser & plasma processing

Six times faster synchronization with external devices for high-precision laser and plasma processing



Laser oscillator

I/O signal control



High-precision robot FD-A20

Improved I/O signal response time by 80%!

